


Manufactured by:

ENSTO

BEN-A1-VA/1

VARISIL™ HE

Distribution Surge Arresters

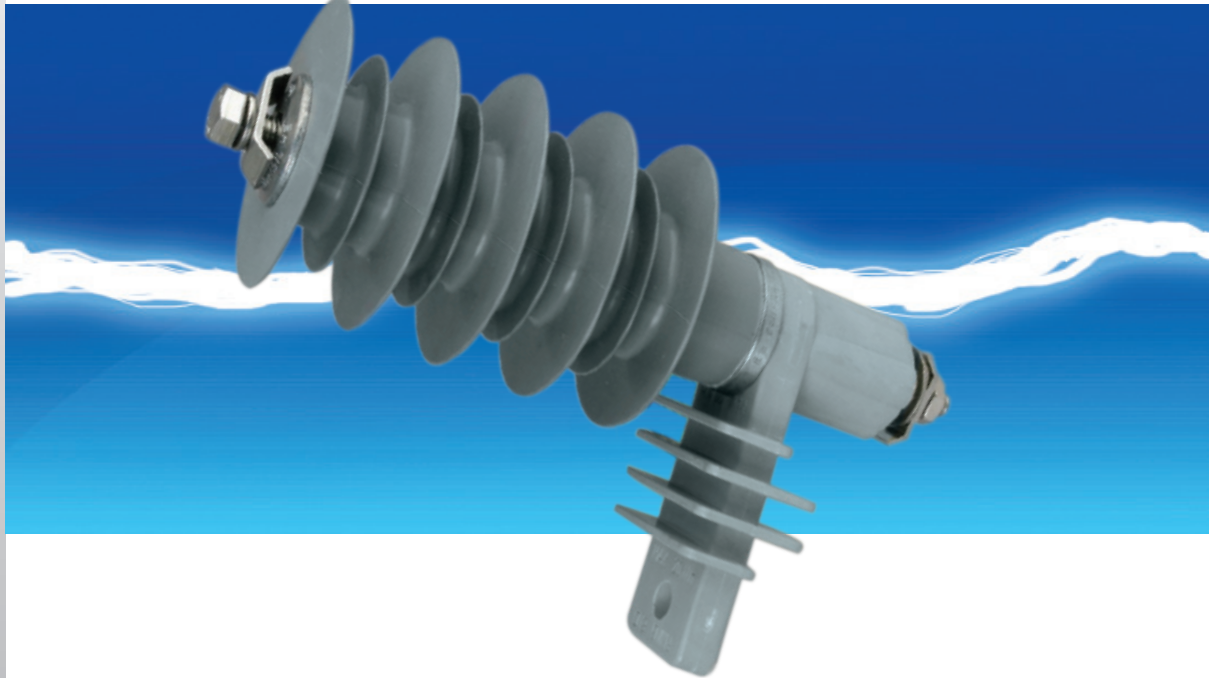

With 50 years of experience in surge protection, ENSTO provides products suitable to the user's expectations.

Overvoltage protection is of key importance for utilities to improve their networks' quality and reliability.

Appropriate surge protection increases the quality of power supply and minimizes system outage costs.

THE RIGHT SURGE ARRESTER AT THE RIGHT PLACE!

Our VARISIL™ HE is of polymer housed gapless metal oxide type dedicated to overvoltage protection of Distribution networks.

The metal oxide varistor blocks are manufactured by ourselves using our own formulas and processes.

These blocks are mechanically bounded in a fiberglass reinforced epoxy resin, encapsulated in a silicone rubber housing providing outstanding insulation performance and low losses.

Our VARISIL™ HE surge arrester fulfils all requirements of IEC60099-4 (10kA/ Line Discharge Class 1) and ANSI/IEEE C62.11(Distribution Heavy Duty) latest editions.

Since 1995

**pazifik
power**

www.ppi.ph

VARISIL™ HE

The VARISIL™ HE is available with different options and accessories.

NO OPTION

The surge arrester is supplied with bolts, washers and clamp for connection.

S3D2 OPTION

The surge arrester is supplied with a ground lead disconnector and an insulating bracket

This option is recommended for improved continuity of service.


IF OPTION

The surge arrester is supplied with an electronic fault indicator using a red flag for easy visualization.

ACCESSORIES

- Metal bracket for horizontal or vertical mounting
- Ground lead
- Pedestal (insulated or not)
- Bird Guard Cap

(*) : for higher mechanical performance, refer to our HE-S or HI products

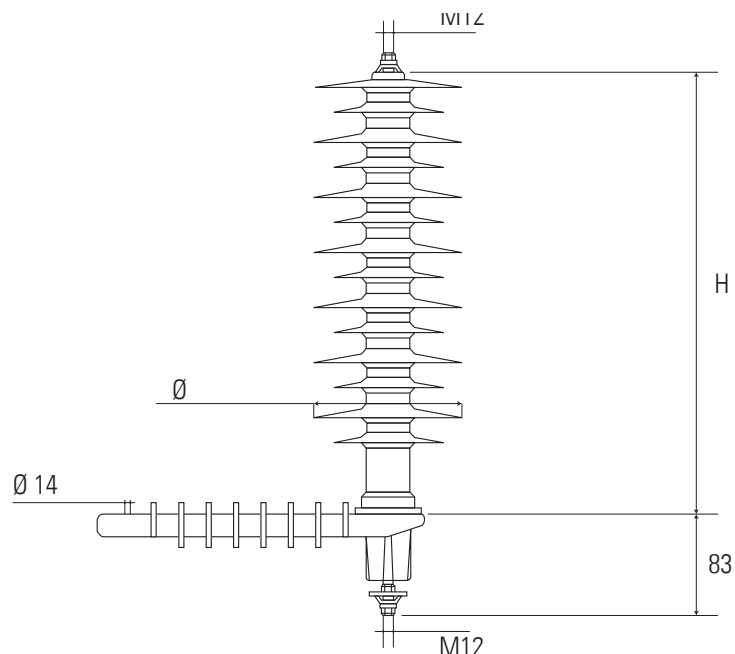

Rated Voltage (Ur)	5 to 36 kV rms
Nominal discharge current (In)	10 kA with 8/20 waveshape
Line discharge class	1
High current impulse withstand	100 kA with 4/10 waveshape
Long duration current impulse withstand	300 A with 2000µs waveshape
Energy absorption capability (with 4/10 waveshape)	4.8 kJ/kV of Uc
Maximum permissible static service load	10 daN.m (*)
Short circuit current withstand	20 kA / 0.2s - 600 A / 1s

Model	Unit	HE 05	HE 06	HE 09	HE 10	HE 12	HE 15	HE 18	HE 21	HE 24	HE 27	HE 30	HE 33	HE 36
Rated voltage Ur	kV rms	5	6	9	10	12	15	18	21	24	27	30	33	36
Continuous operating voltage Uc	kV rms	4.25	5.1	7.65	8.4	10.2	12.7	15.3	17.5	20.0	22.5	25.0	27.5	30.0
Maximum residual voltage	kV peak													
- at 5kA 8/20		14.3	15.4	26.4	27.5	30.8	40.7	46.2	56.1	61.2	72.2	76.2	87.2	91.7
- at 10kA 8/20		15.2	16.4	28.1	29.3	32.8	43.3	49.1	59.7	65.1	76.8	81.1	92.8	97.5
- at 20kA 8/20		16.8	18.1	31.1	32.4	36.2	47.8	54.3	66.0	71.9	84.9	89.6	102.5	107.5
Switching residual voltage at 500A - 30/80	kV peak	12.1	13.0	22.3	23.3	26.1	34.4	39.0	47.5	51.8	61.1	64.5	73.8	77.5
Steep current impulse residual voltage at 10kA - 1/2.5	kV peak	16.4	17.7	30.3	31.6	35.4	46.8	53.0	64.5	70.3	82.9	87.6	100.2	105.3
Lightning impulse withstand level of housing	kV 1.2/50	95					110			125		170		
Creepage distance	mm	480					650			800		1200		
Dimensions H	mm	165					205			245		325		
Ø	mm	104					109					114		
Weight (S3D2 option)	kg	1.3	1.3	1.5	1.5	1.6	2.0	2.1	2.5	2.6	3.1	3.2	3.4	3.5

Efficient Electricity Solutions

PPI is a company with more than twenty (20) years of successful operation in the Philippines.

Over the years, it has developed and actively supplied an extensive and full power line of products and services from the best manufacturers in Europe. Among its most sought top-of-the-line products are: Turnkey projects in the supply of substations with rated voltage of up to 230kV, electricity meters, meter test equipment, instrument transformers, power transformers, disconnectors, fault indicators, surge arresters, switchgears, oil testers, cable diagnostics, batteries, harmonic filters, and automation systems, among others.

Our commitment to establish closer customer relationships and to further improve your business operation make us understand your power solution requirements. PPI's seasoned professional Electrical Engineers deliver the unique support tailored-fit for each customer needs. The company's cutting edge is its high quality, durable, and innovative power infrastructure equipment and an unparalleled delivery of reliable on-time service performance.



MAKATI HEAD OFFICE

4/F and 6/F, South Park Plaza, Santiago Street
Paseo de Magallanes Commercial Center
1232 Makati City, Metro Manila, Philippines

Tel.: +63 2 511 88 88 | Fax: +63 2 836 43 23
E-mail: info@ppi.ph | Website: www.ppi.ph
Facebook: www.facebook.com/PazifikPowerInc

CEBU BRANCH

Unit 3 ASY Bldg. A.C. Cortes Ave.
Mandaue City, Cebu, Philippines
Telefax: +63 32 520 55 23

